

Product Information Card


Product Code: BT.ES3311

Product Description: Photocell Top Inlet Urinal Flush System

Product Image



Technical Drawing

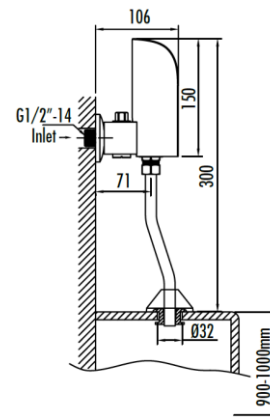

Product Technical Specifications

Dimensions:

- Outlet length: 71 mm
- Main body height: 150 mm
- Total installed height: 300 mm
- Product width: 106 mm

Surface:

- Chrome plated
- Transparent black glass

Flow and Durability:

- Flow rate at 3 bar during operation (10 seconds): 1.5 – 2 L
- Working pressure: Min 1 bar – Max 5 bar
- Can be mounted on vertical surfaces

Functions and Features:

- **Hygienic:** Automatic on/off feature provides contact-free usage, preventing bacterial infections and ensuring hygienic operation.
- **Smart:** Thanks to microcomputer control, the urinal flush determines the best detection area. The device also has the feature of not being affected by light and ultraviolet rays.

- **Low Power Consumption:** With 4 AAA alkaline batteries in DC mode, it can flush up to 108,000 times.
- **Odor Prevention:** If the product is not used, it automatically flushes once every 24 hours to prevent odors caused by stagnant water in the pipes

Installation:

Installation type: Can be mounted on vertical surfaces

Warranty and Standards:

- Warranty: 2 years
- Standards: TSE EN 15091
- EN248 Corrosion resistance: 200-hour salt spray test

Packaging Information:

- Included parts in the box: Wall and ceramic rosettes, urinal hole cover plug
- Weight: 1,145 kg
- Box quantity: 12 units

Product Usage Recommendation:

- Do not clean with heavy chemical cleaning agents.
- To maintain surface shine, wipe the surface with a dry cloth after each use.